
AP141 ANCHOR DETAILS USING RIVETS ONLY CLIP-FIX TYPE ROOFING


CRITERIA

1. Minimum 3 Purlins

2. Anchor must be fixed over 2 roof sheets

IT IS MOST IMPORTANT TO ENSURE ANCHOR IS RIVETED CORRECTLY IN RALATION TO THE LAP

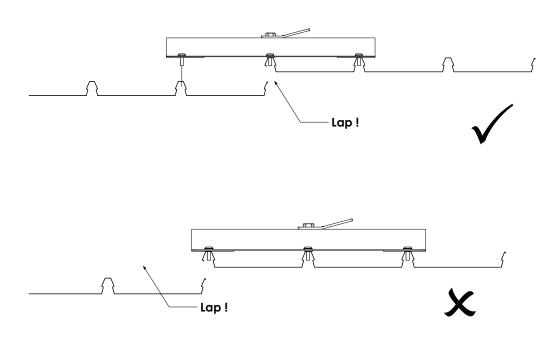

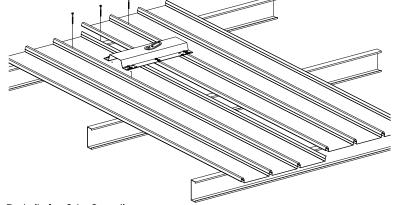

Details for <u>3 to 9 purlins</u> Min 3 Fixings into purlins - Fixings into purlin above or below anchor plate (closest purlin to anchor plate). MIN 12 Rivets required in Anchor Plate <u>10+ Purlins</u> - No additional fixings required


NOTE ALL ANCHOR PLATES SHOULD BE FIXED TO THE PURLINS 'WHERE POSSIBLE''.


			This drawing remains the property of Kattsafe and may not be changed without written permission				
Kattsafe	 A 1029 Mountain Hwy Boronia VIC 3138 T +61 1300 301 755 	Description	Drawing No	Product Code	Date	Revision	
	E sales@kattsafe.com.au W kattsafe.com.au	Top mount rope access anchor on clip-fix and screw-fix roof with rivets only	D9308	AP141	16.02.2021	1	

AP141 ANCHOR DETAILS USING RIVETS ONLY SCREW-FIX TYPE ROOFING

CRITERIA

- 1.3 Purlins minimum
- 2. Anchor must be fixed over 2 roof sheets

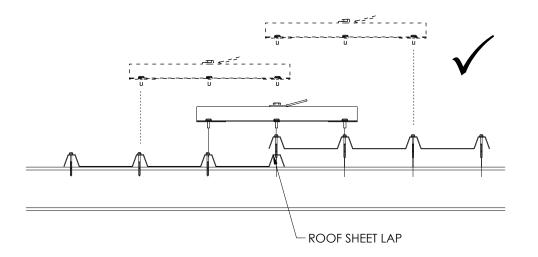

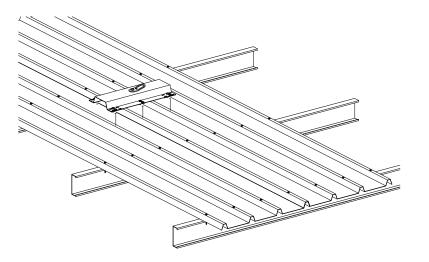

Minimum 3 Purlins Anchor riveted through lap (fixed over 2 roof sheets) QTY 12 x 8mm Bulb type Rivets required in Anchor Plate

NOTE ALL ANCHOR PLATES SHOULD BE FIXED TO THE PURLINS 'WHERE POSSIBLE".

			This drawing remains the property of Kattsafe and may not be changed without written permission				
Kattsafe	A 1029 Mountain Hwy Boronia VIC 3138 T +61 1300 301 755	Description	Drawing No	Product Code	Date	Revision	
	E sales@kattsafe.com.au W kattsafe.com.au	Top mount rope access anchor on clip-fix and screw-fix roof with rivets only	D9308	AP141	16.02.2021	1	